

DT-Series

Delta Three Phase, T-Section, 2-Stage

12704 W. Arden Place
Butler, WI 53007 USA


Phone: 262-790-0092

Fax: 262-790-0095

Website: www.emissioncontrol.com

E-mail: info@emissioncontrol.com

Part Number System




Agency Approvals:



Part Number	Current Rating Amps	Schematic
-------------	---------------------	-----------

DT10	10
DT20	20
DT30	30
DT40	40
DT60	60

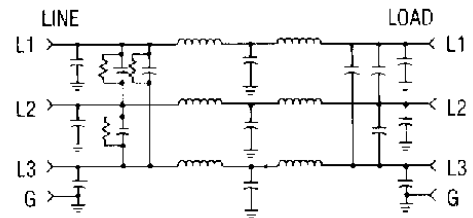

Electrical Specs

Rated Voltage: 250VAC 50/60 Hz.

Rated Current: @ 40° C

Hipot Rating:

Line to Ground: 1500 VAC, 2 sec.

Line to Line: 1450 VDC, 2 sec.

Climatic Category: HPF (25/085/21)

Maximum leakage current:

each line to ground
@ 250 VAC 60 Hz 3.4ma

Minimum insertion loss — dB (50 ohm circuit)

Current Rating	Mode	Frequency - MHZ						
		.05	.15	.5	1	5	10	30
10	Common	45	65	65	65	65	65	65
	Differential	41	65	65	65	65	65	65
20	Common	43	65	65	65	65	65	65
	Differential	40	65	65	65	65	65	65
30	Common	25	58	65	65	65	65	65
	Differential	31	60	65	65	65	65	65
40	Common	11	46	65	65	65	65	65
	Differential	23	55	65	65	65	65	65
60	Common	1	22	57	65	65	65	59
	Differential	6	41	65	65	65	65	65

Mechanical Specs

Construction: Metal case with stud terminals. Internal components and terminations sealed with self-extinguishing wax.

Connections: #1/4—Studs

Dimensions: $\frac{\text{inches}}{\text{(mm)}}$

