


# HT-Series

Delta Three Phase, T-Section, 2-Stage

12704 W. Arden Place  
Butler, WI 53007 USA  
**Phone:** 262-790-0092  
**Fax:** 262-790-0095  
**Website:** www.emissioncontrol.com  
**E-mail:** info@emissioncontrol.com

**Part Number System**




**Agency Approvals:**



**Part Number      Current Rating Amps      Schematic**

HT10	10
HT20	20
HT30	30
HT40	40
HT60	60

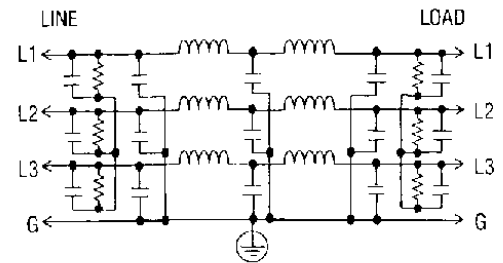

**Electrical Specs**

Rated Voltage: 600VAC 50/60 Hz.  
Rated Current: @ 40° C  
Hipot Rating:  
Line to Ground: 2200 VAC, 2 sec.  
Line to Line: 3080 VDC, 2 sec.  
Climatic Category: HPF (25/085/21)  
Maximum leakage current:  
each line to ground  
@ 600 VAC 60 Hz 7.9ma

Minimum insertion loss — dB (50 ohm circuit)

Current Rating	Mode	Frequency - MHZ						
		.05	.15	.5	1	5	10	30
10	Common	36	65	65	65	65	65	65
	Differential	42	65	65	65	65	65	65
20	Common	34	65	65	65	65	65	65
	Differential	41	65	65	65	65	65	65
30	Common	13	52	65	65	65	65	65
	Differential	32	61	65	65	65	65	65
40	Common	---	41	65	65	65	65	65
	Differential	25	57	65	65	65	65	65
60	Common	---	15	64	65	65	65	65
	Differential	10	42	65	65	65	65	57

**Mechanical Specs**

Construction: Metal case with stud terminals. Internal components and terminations sealed with self-extinguishing wax.  
Connections: #1/4—Studs

Dimensions: inches (mm)

